


### Parts List :



2 x Brackets

(4 for blinds over 105cm wide)



2 x Washers

(4 for blinds over 105cm wide)

(This is attached to the bolt on the bracket)



2 x Wing nuts

(4 for blinds over 105cm wide)

(This is attached to the bolt on the bracket)




8 x Bracket Screws

(16 for blinds over 105cm wide)



2 x Cord Cleat Screws



1 x Cord Cleat




8 x Plastic Wall Anchors

(16 for blinds over 105cm wide)


Care Instructions : To maintain the beauty of your blind, dust using a soft clean cloth or soft brush.

### Installation :

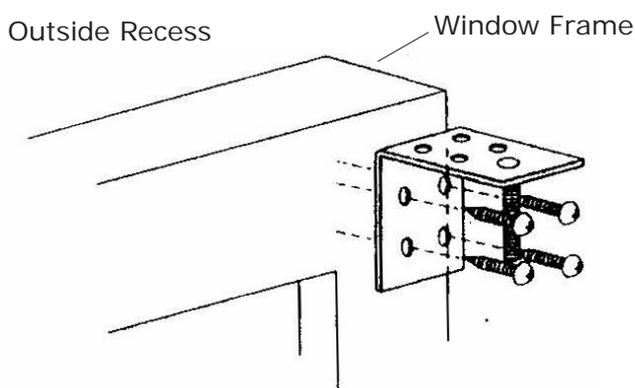

#### Step one : Positioning the Blind.

- The blind can be positioned either inside the window frame (inside recess) or outside the window frame (outside recess).
- Hold the blind up to the window exactly as you want it after installation, ensuring the blind is centered and level.
- Mark the exact position on the mounting surface using a pencil about 25mm in from each end of the headrail.

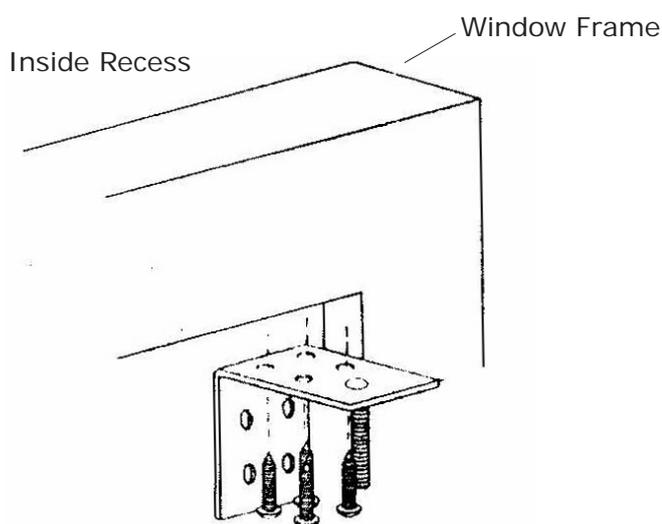


#### Step two : Installing the Brackets.

- Place the first bracket on the pencil mark and mark the four drill holes.
- After drilling the holes, secure the bracket with the screws.


**OUTSIDE RECESS :** Brackets should be positioned on the outside of the window recess using the back holes of the bracket.

**INSIDE RECESS :** Brackets should be positioned on the inside of the window recess using the top holes of the bracket.

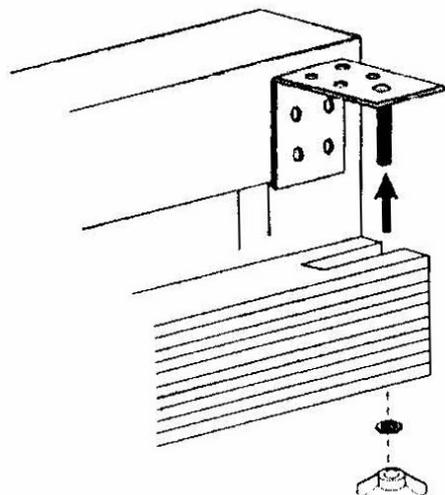

Step three : Attaching Headrail to the Brackets


- Remove wing nuts and washers from the bolts on the bracket.
- Align slits of the headrail with the bolts on the bracket and slide headrail up.
- Secure blind to the bracket using the washers and wing nuts.

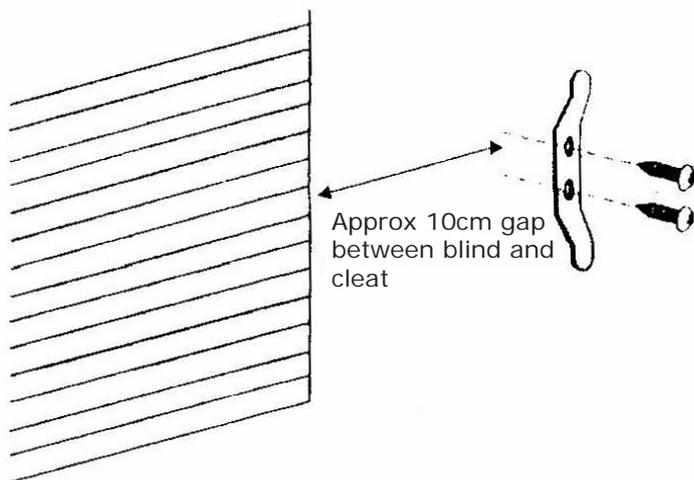

Step four : Installing the Cord Cleat.

Position the cord cleat about about 10cm out from the right hand side of your wood weave blind and around half way up the height of the blind.

Mark position through the holes and secure the cord cleat with the cord cleat screws.



### **Warning!**

To avoid the risk of strangulation, it is advisable to keep all the pull cords out of the reach of children. Safety measures include :

- Installation of safety devices such as clamps and cleats that reduces the accessibility of the cord.
- Move cots and furniture away from the window to avoid accessibility to the cord.